


# MODULAR 3D 30

LED bars with triangular section, made with aluminum, available in modules of 3 different lengths. Extensible with appropriate linear and corner joints. The especially designed optics makes product lighting particularly effective.

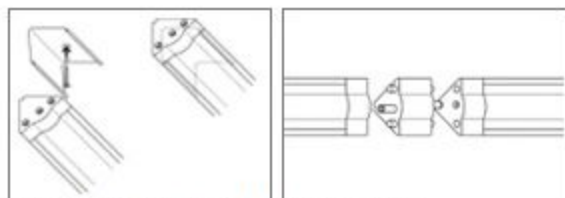

Mounting Bracket included in the package.  
Joints for linear mounting are available on request.

## Presentation

## Technical data

## 2D draws

## Accessories

### Specifications

Power type	Constant Voltage
Light source	42 x LED
Supply	10÷15 V / 20÷30 V
Power consumption	3 W
Current consumption	0.25A @ 12V / 0.13A @ 24V
Average lifetime	50,000 h
IP security degree	40

### Design

Frame material	ALLUMINIUM
Finishings	SATIN
Light colours	WARM WHITE
Mounting	SCREWS

### Photometric data

WARM WHITE

Light flow	2800-3100 °K
Efficiency	220 lm
	73 lm/W

### Certifications

