



Solar Panels TX-series

TX - light-weight solar panels with textile frame of high-quality tarpaulin fabric. Foldable, with up to 4 wings. For sprayhood, bimini, wind dress and cover. Made in Germany.

Product characteristics

- Circumferential soft fabric edge for mounting on textile surfaces / coverings
- Appropriate LOXX base parts for fastening are enclosed
- Multi-wing modules are foldable
- With 12V modules, each wing of a TX module works as a separate module, with 24V modules in pairs
- Waterproof plug and coupler are enclosed, for simple and quick electrical installation
- 1m connecting cable + 10m cable (3m at TX-11027) are included
- 100% sea- & saltwater resistant
- Partly also available as 24V version
- Monocrystalline PERC solar cells for maximum performance
- Non-Glass-module with unbreakable Nowoflon foil
- Light-weight mounting plate, 3mm aluminium sandwich, powder-coated white, fully encased in EVA
- Cable output screwed, sealed and utterly water proof
- Ultraflat module construction (5mm), at cable output 15mm
- 100% maintenance-free, self-cleaning surface
- 3 years warranty on power output

		TX-11027	TX-12039	TX-12052	TX-22039 (TX-22239)	TX-22052 (TX-22252)	TX-42039 (TX-42239)	TX-42052 (TX-42252)
Power	[Wp]	20	45	60	90	120	180	240
System voltage	[V]	12	12	12	12 (24)	12 (24)	12 (24)	12 (24)
I sc	[A]	1,1	2,5	3,3	5,0 (2,5)	6,6 (3,3)	10,0 (5,0)	13,2 (6,6)
I max	[A]	1,01	2,3	3,1	4,6 (2,3)	6,2 (3,1)	9,3 (4,6)	12,3 (6,2)
U oc	[V]	24,8	24,5	24,5	24,5 (29)	24,5 (29)	24,5 (49)	24,5 (49)
Length A	[mm]	668	873	1106	873	1106	929	1164
Width	[mm]	333	431	431	826	826	1590	1590
Pack size (l x w)	[cm]	67 x 34 x 2	88 x 44 x 2	111 x 44 x 4	90 x 42 x 4	115 x 42 x 4	95 x 42 x 6	120 x 42 x 6
LOXX fasteners	[no.]	–	8	10	8	10	12	12
Weight netto	[kg]	1,0	2,2	2,6	4,2	5,1	8,2	10,9
Weight brutto	[kg]	1,5	5,4	6,4	7,2	8,8	11,7	14,4
Cable length	[m]	3	1+10	1+10	1+10	1+10	1+10	1+10
Cable cross-section [mm ²]		2 x 1,5	2 x 1,5	2 x 1,5	2 x 2,5	2 x 2,5	2 x 2,5	2 x 2,5
No. of wings		1	1	1	2	2	4	4

Valid for all TX-modules: laminate: ETFE/EVA/ETFE / carrier plate: Alu-Sandwich white / individually packed / series connection of 12V modules only permitted if a cell protector is used per module /

Permitted environmental conditions: – 40 bis + 85 °C


Thermal characteristic values of monocrystalline solar cells: TK I_{sc}: 0,06%/K, TK U_{oc}: -0,30%/K, TK P_{mpp}: -0,39%/K

P_{max} according to STC (standard test conditions) AM 1,5, 1000 W/m², 25°C, measurement tolerance: 10%.



Technical changes reserved. State 01/2022

TX-Panels 12/24V

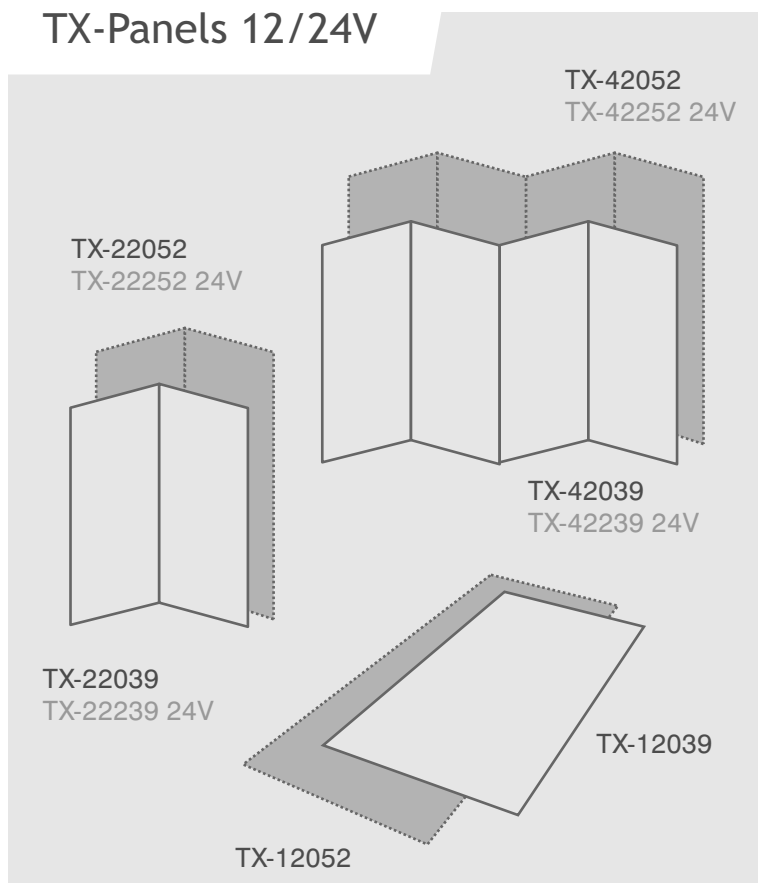

RANGE OF APPLICATIONS


- For motor boats and sailing yachts
- For camping and caravan
- For mobile current supply



Installation notes

- TX solar modules are sewn into a textile frame. The soft transition from the rigid module to the textile frame allows the modules to be fastened to taut textile surfaces such as sprayhood, bimini or tarpaulin.
- The module itself is fastened to textile tops using LOXX fasteners. Matching LOXX base parts for textile surfaces are enclosed with each module.
- Each wing of a multi-wing module works independently. This reduces power loss in case of partial shading.

DIMENSIONS

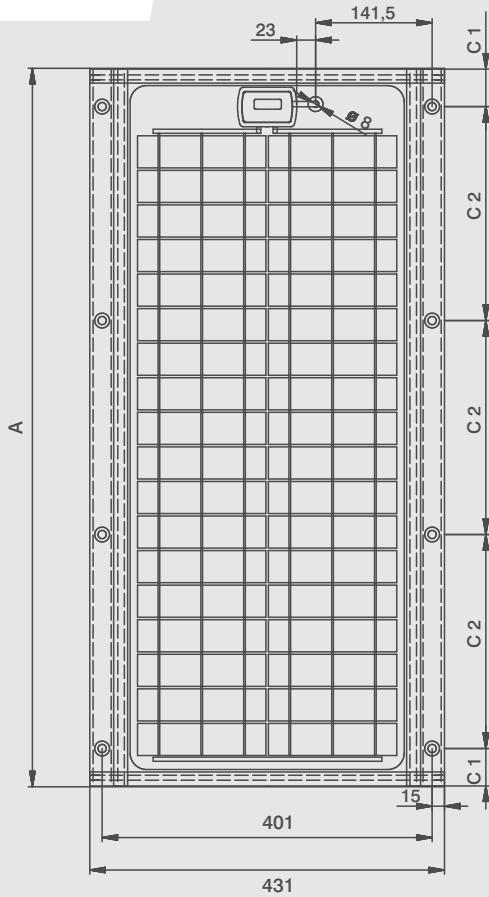


TX-12039/-12052


	A [mm]	C 1 [mm]	C 2 [mm]
TX-12039	873	45,5	260
TX-12052	1106	51,0	251

Technical drawings at www.sunware.de/download

Electrical characteristic

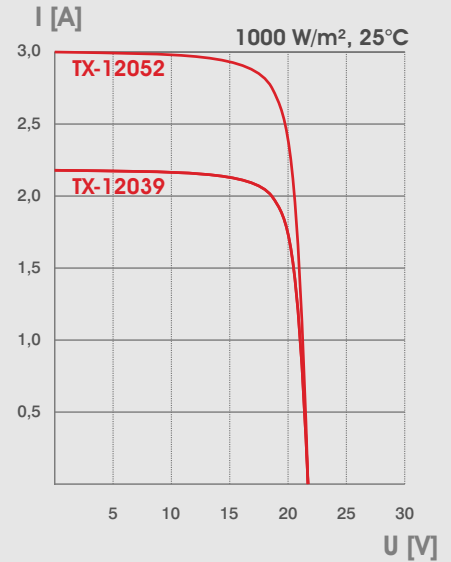

DIMENSIONS

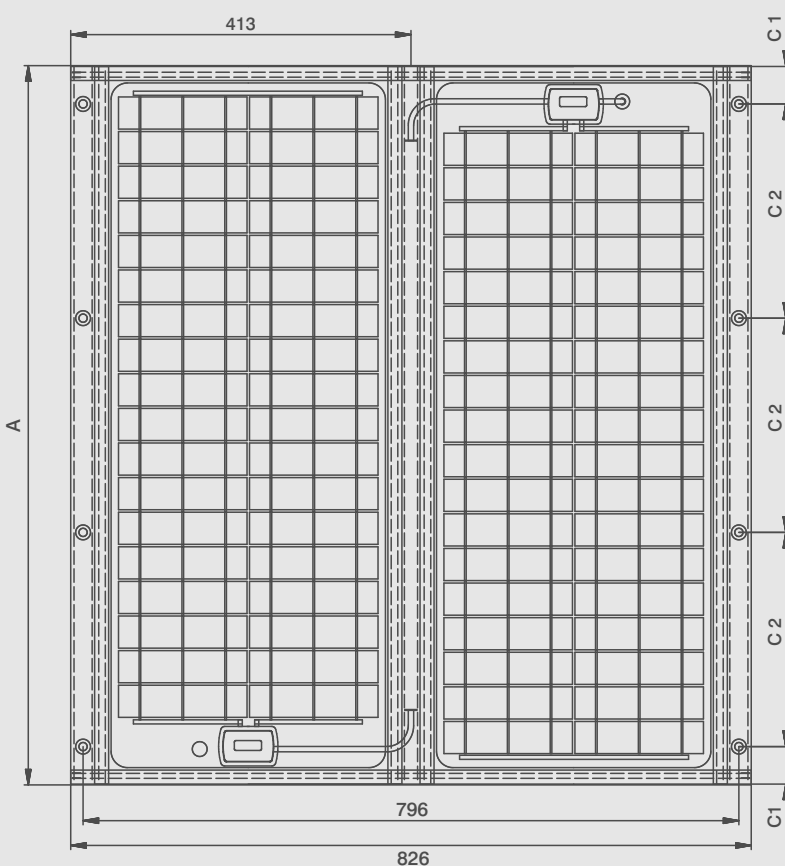


TX-22039/-22239/-22052/-22252

	A [mm]	C 1 [mm]	C 2 [mm]
TX-22039/ -22239	873	45,5	260
TX-22052/ -22252	1106	51,0	251

Technical drawings at www.sunware.de/download

Electrical characteristic

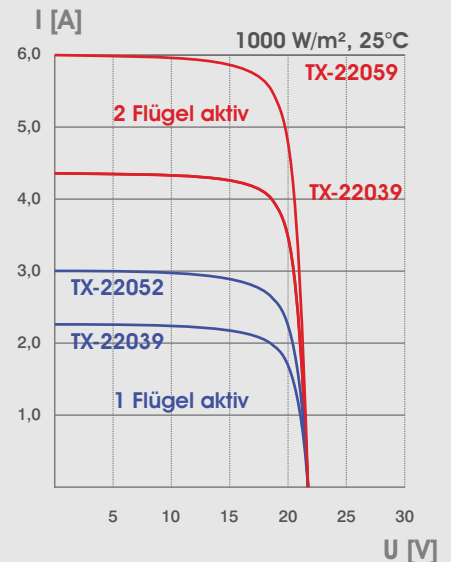


TX-42039/-42239/-42052/-42252


	A [mm]	C 1 [mm]	C 2 [mm]
TX-42039/ -42239	929	871	899
TX-42052/ -42252	1164	1106	1134

Technical drawings at www.sunware.de/download

DIMENSIONS

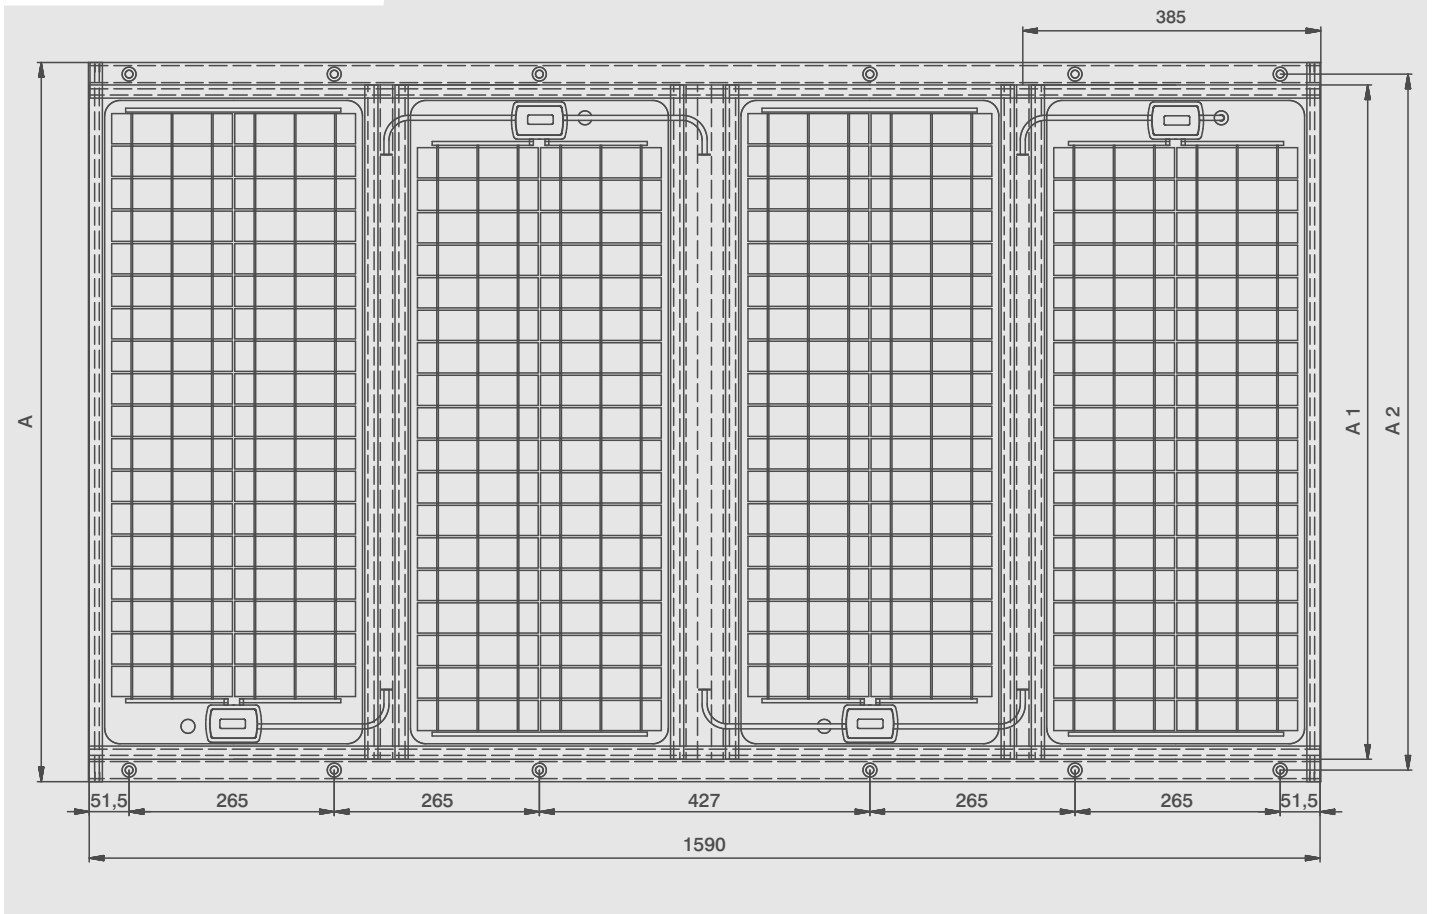

Electrical characteristic TX-42039

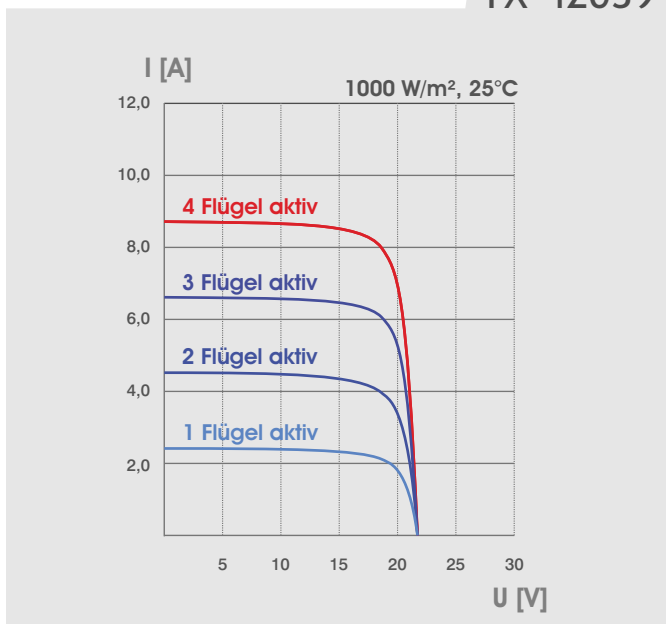

Electrical characteristic TX-42052

