


MODULAR 3D 50

LED bars with triangular section, made with aluminum, available in modules of 3 different lengths. Extensible with appropriate linear and corner joints. The especially designed optics makes product lighting particularly effective.

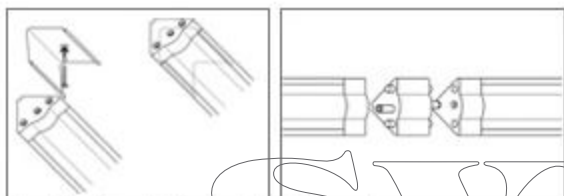

Mounting Bracket included in the package.
Joints for linear mounting are available on request.

Presentation

Technical data

2D draws

Accessories

Specifications

Power type	Constant Voltage
Light source	72 x LED
Supply	10-15 V / 20-30 V
Power consumption	5 W
Current consumption	0.42A @ 12V / 0.21A @ 24V
Average lifetime	50,000 h
IP security degree	40

Design

Frame material	ALLUMINIUM
Finishings	SATIN
Light colours	WARM WHITE
Mounting	SCREWS

Photometric data

WARM WHITE

Light flow	2800-3100 °K
Efficiency	370 lm
	73 lm/W

Certifications



LED Protection: Spike protected \pm 500V
Polarity sensitive: YES