


00551-BLD/00551-SLD/00551-WBLD/00551-WSLD

Material	BLD/WBLD: Made of Brass    SLD/WSLD: Made of SUS304
Housing Colour	BLD/WBLD: Brass Lacquered    SLD/WSLD: polished S.S
LED Colour	SLD/BLD: Daylight White    WSLD/WBLD: Warm White
LED	20PCS
LED Beam Angle	120°
Colour Temperature	■ Warm White: 2900-3200K ■ Daylight White: 5500-6300 K
Features	Surface mount
Working Voltage	DC12V
Wattage	3.3 W
Effective Lumen	268Lumen
life TEST FOR LED LAMP (1000 hours)	Lumen Maintenance Percentage >95%
Operation Temperature	-20° ~ +45°C
Certificate	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">UL</div> <div style="border: 1px solid black; padding: 2px;">CE</div> <div style="border: 1px solid black; padding: 2px;">RoHS</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div> <div style="text-align: center; margin-top: 5px;"> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; margin-right: 10px;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black;"></span> </div>

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed

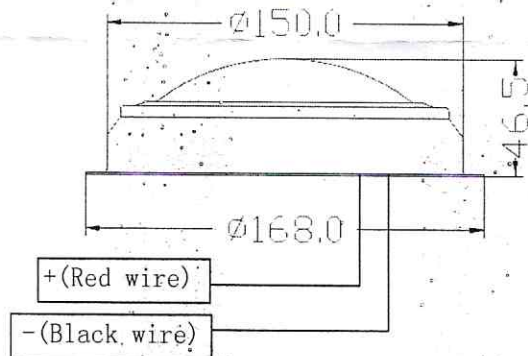

GONIOPHOTOMETER TEST REPORT (White)

